

Overview

- 2 mm
- 1,6 mm
- NPN break function (NC)
- cable, 2 m
- -25 ... 75 °C
- IP 67



Picture similar



Technical data

General data

Mounting type	Flush
Nominal sensing distance S _n	2 mm
Assured sensing distance S _a	1.6 mm
Temperature drift	± 10 % of S _r (0 ... +60 °C)
Hysteresis	3 ... 20 % of S _r
Output indicator	LED red

Electrical data

Switching frequency	3 kHz
Voltage supply range +V _s	10 ... 30 VDC
Current consumption max. (no load)	15 mA
Output circuit	NPN break function (NC)
Voltage drop V _d	<2.5 VDC

Electrical data

Output current	200 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

Mechanical data

Design	Cylindrical threaded
Material (sensing face)	PBT, red
Housing material	Stainless steel
Dimension	8 mm
Housing length	30 mm
Connection types	Cable, L=2 m
Tightening torque max.	5 Nm


Ambient conditions

Operating temperature	-25 ... +75 °C
Protection class	IP 67


Remarks

- Compliant with EMC requirements of EN 60947-5-2: 2007

Dimension drawing

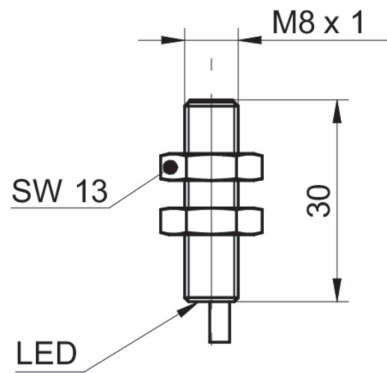

Connection diagram

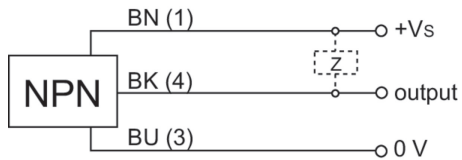

Accessories

Mounting accessories

10151719

Sensofix series 08 round